




Door Parts

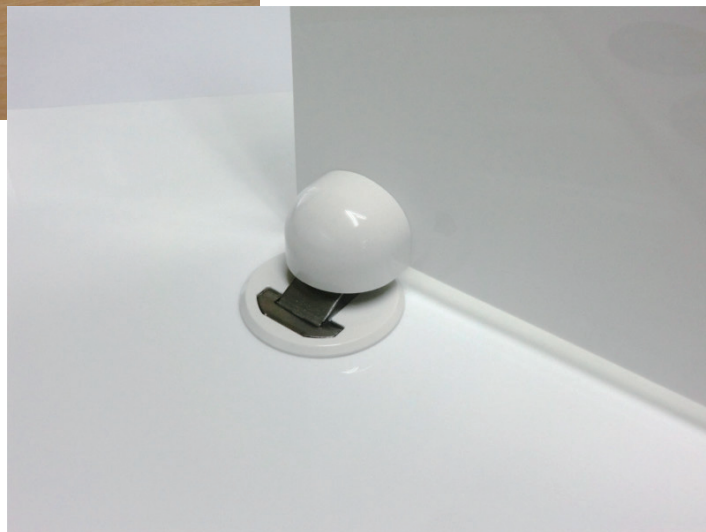

Soft Door Closer for Hinged Door (Standard Type)

Load Capacity
588N

Screw driver

Even if you shut a hinge door with a bang, the door can be closed quietly by the brake of soft close.

In addition, This product "soft close" is a green product because the door is automatically closed.

The soft close prevents us from being left the door open.

Therefore we can save the energy such as air-conditioner.

Passing 500,000 times of endurance test.

Install Range : Up Down $\pm 5\text{mm}$, Right Left $\pm 5\text{mm}$
Front Back $\pm 4\text{mm}$

Material : <Main unit> ABS, POM
<Bracket spool> ABS, SUS304, ZDC
<Liner> SPCC

Product : Soft Close for Hinged Door

Product No		Door weight	Finish/Color
Left-Hand	Right-Hand		
312-021	312-025	294N (30kg)	Gold Painting
312-022	312-026		Silver Painting
312-023	312-027		Gray
312-024	312-028		Brown
312-051	312-055	588N (60kg)	Gold Painting
312-052	312-056		Silver Painting
312-053	312-057		Gray
312-054	312-058		Brown

Including :

<Main unit> M4×12 Pan machine screw 2pcs
M4 Plain washer 2pcs

<Bracket spool> 4×30 Truss tapping screw 2pcs


<Liner> 4×20 Flat tapping screw 3pcs

Reinforcement part


312-029 The liner installed for a door 1pce



Gray




Brown




Gold Painting




Silver Painting

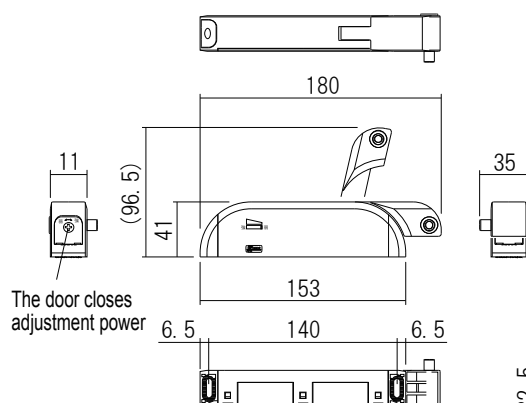


Main unit



Bracket spool

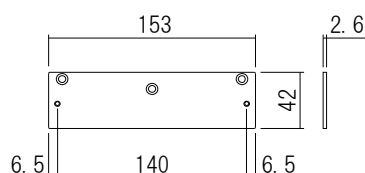

The liner installed for a door

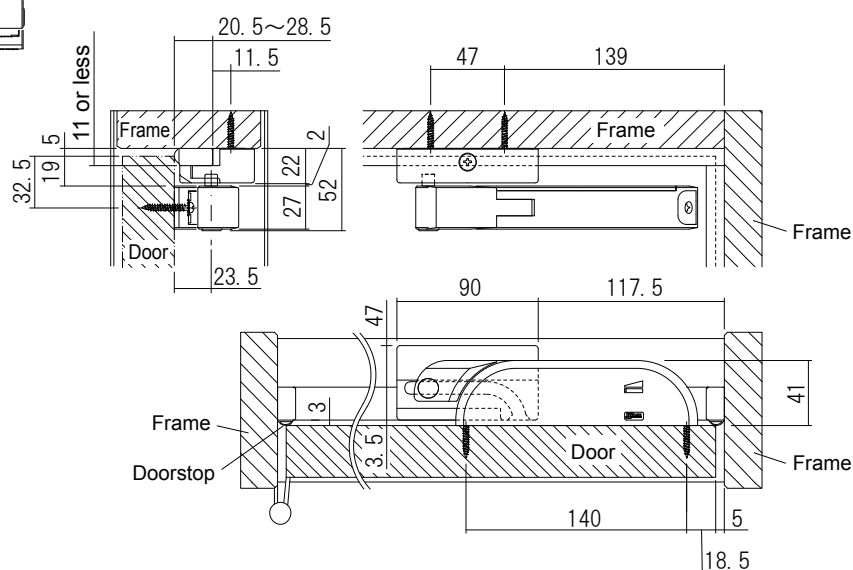

Installation reference (The above is Right-Hand)

Mounting location dimensions to a door material are reference levels.

Please attach it according to an attached instruction manual and a paper pattern.



Before operation



After operation

Smart Door Stop (Magnet Door Stopper)



2012 Good Design Award product.

Smart Door Stop can be installed on the floor without digging a hole.
The height of installed magnet plate on the floor is 3mm under consideration of barrier free.
Passing 100,000 times of endurance test.


Material : <Main unit> Neodymium, ABS, PA6
<Bracket> SUS430, ABS

Load Capacity : 294N (30kg)

Product : Smart Door Stop

Product No	Finish/Color
220-251	White
220-252	Silver
220-253	Gold
220-254	Silver Painting
220-255	Gold Painting
220-256	Chrome Plating

Including :
<Main unit> 4×20 Pan tapping screw 2pcs
<Bracket> 3×12 Flat tapping screw 3pcs

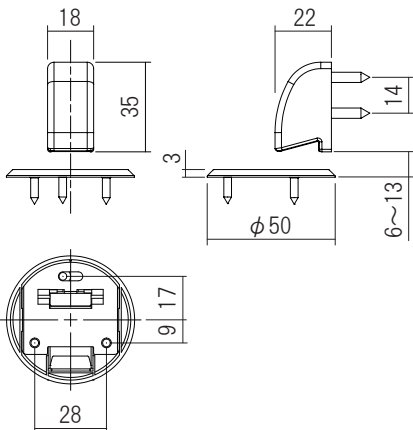

Before operation



After operation

2013 Good Design Award product.

Door Keeper can be installed on an surface of floor and door without digging a hole. The door is held at the regular position by magnet catcher of Door Keeper.

The door lock is released when someone pull the door with a little force and then you can closed the door.

Passing 100,000 times of endurance test.

Material : < Main unit > Neodymium, ABS, POM
< Bracket > SUS430, ABS

Load Capacity : 980N (100kg)

Product : Door Keeper

Product No	Finish/Color
220-261	White
220-262	Silver
220-263	Gold
220-264	Silver Painting
220-265	Gold Painting
220-266	Chrome Plating

Including :

< Main unit > 4×20 Pan tapping screw 2pcs

< Bracket > 3×12 Flat tapping screw 4pcs




Product : Door Keeper Concealed Type

Product No	Finish/Color
220-271	White
220-272	Silver
220-273	Gold
220-274	Silver Painting
220-275	Gold Painting
220-276	Chrome Plating

Including :

< Main unit > 4.2×32 Pan coarse thread screw 4pcs

< Bracket > 3×12 Flat tapping screw 4pcs

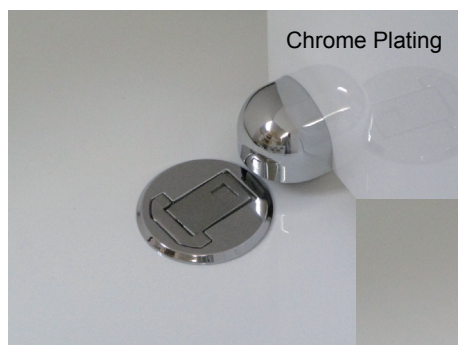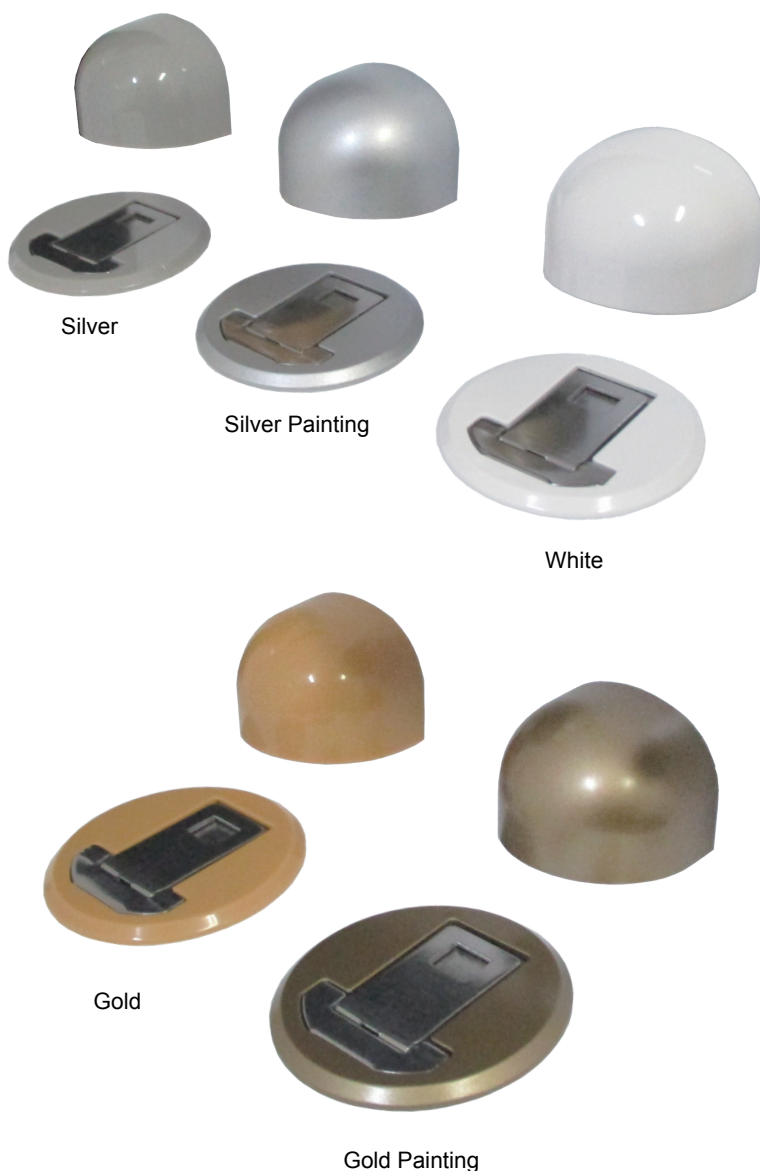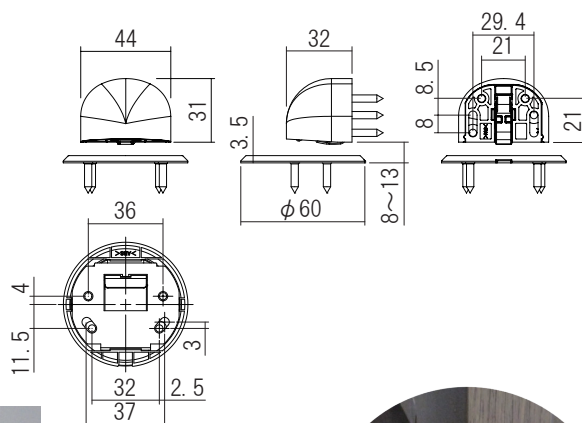

Before operation



After operation



Concealed Type

Pivot Hinge



Pivot Hinge has a compact and simple design to creat beautiful interior space.
Pivot Hinge can adjust three-dimensional position without removing the door.
Up and Down / Front and Back / Left and Right.

Material : <Body> SPCC, ZDC SUS430 <Cover> ABS

Load Capacity : 294N (30kg)

Recommended door thickness : 33mm

Adjustable Range : Front Back ± 2 mm, Right Left ± 2 mm

Up Down +4mm,-2mm

Product : Pivot Hinge



Product No		
Left-Hand	Right-Hand	Finish/Color
215-011	215-015	Gold Painting
215-012	215-016	Silver Painting
215-013	215-017	Satin Silver
215-014	215-018	Chrome Plating

Including :

<By Upper> 3.5×20 Flat tapping screw 2pcs
M4×12 Flat machine screw 2pcs
M4 Insert nut 2pcs

<By Lower> 3.5×25 Flat wood screw 3pcs

<Body> 3.5×30 Flat tapping screw 6pcs

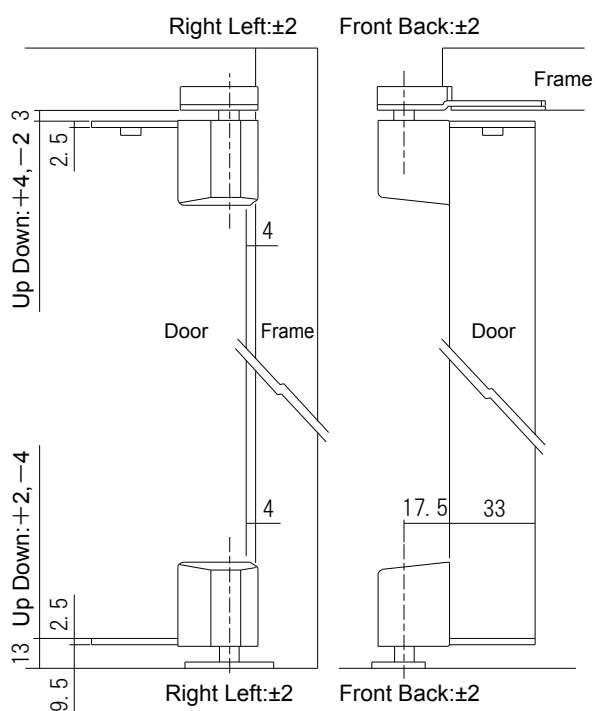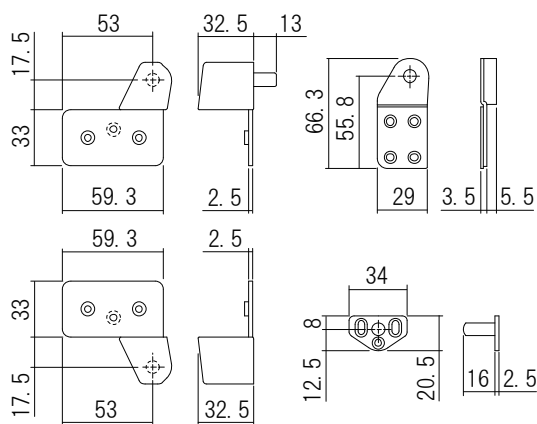

Installation reference (The above is Right-Hand)

※ Necessary digging to a frame and door.



Upper Body




By Upper



Lower Body



By Lower




Gold Painting




Silver Painting




Satin Silver



Chrome Plating

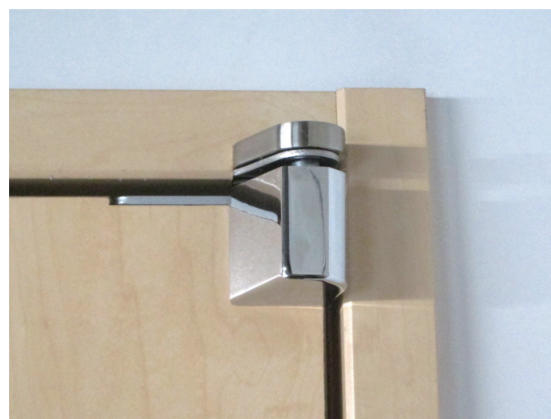

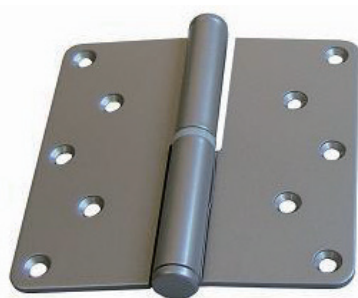


Silver Painting



Amber Painting



Gold Painting

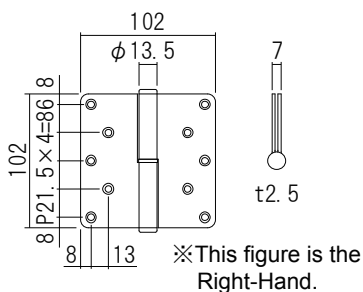

2-Tube Hinge

Load Capacity
294N

Need Digging

Screw driver

Shaft diameter is 8mm, the blade is made of strength steel, and excellent durability.

Material : SPCC

Load Capacity : 294N (30kg)

When using a two piece hinge

Product : 2-Tube Hinge

Product No		Finish/Color
Left-Hand	Right-Hand	
201-021	201-011	Silver Painting
201-022	201-012	Amber Painting
201-023	201-013	Gold Painting


Including : 4×25 Flat tapping screw 10pcs



Amber Painting



Gold Painting

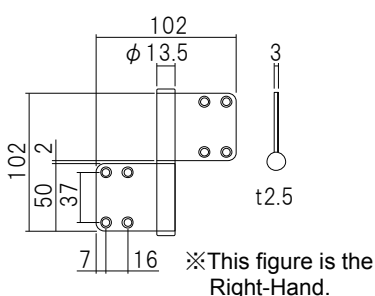

Flag Hinge

Load Capacity
294N

Need Digging

Screw driver

Is the joint flag of imposition.

When installed, you can order also included for easy positioning moat.

Shaft is 8mm in outside diameter, the blade is using a strength steel.

Material : SPCC

Load Capacity : 294N (30kg)

When using the two piece hinges.

Product : Flag Hinge

Product No		Finish/Color
Left-Hand	Right-Hand	
201-222	201-212	Amber Painting
201-223	201-213	Gold Painting

Including : 4×25 Flat tapping screw 8pcs




Metal Fabric



Amber Painting



Gold Painting

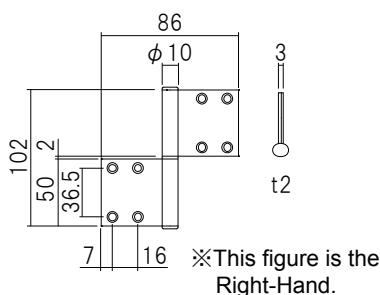

Stainless Steel Flag Hinge

Load Capacity
294N

Need Digging

Screw driver

Is the joint flag of imposition.

For stainless steel has excellent strength and great resistance to corrosion.

Material : SUS304

Load Capacity : 294N (30kg)

When using the two piece hinges.

Product : Stainless Steel Flag Hinge

Product No		Finish/Color
Left-Hand	Right-Hand	
201-521	201-511	Metal Fabric
201-522	201-512	Amber Painting
201-523	201-513	Gold Painting

Including : 4×25 Flat tapping screw 8pcs

Combined Doorstop

Load Capacity 294N
Screw driver
Need Digging

If you can not use it as per the width wood floors in the houses.
For mounting on the frame, secure the feet.

Material : <Bracket> SUS430
<Doorstop> Rabber




Load Capacity : 294N (30kg)

Product : Combined Doorstop

Product No	Finish/Color	Colored rabber
220-212	Metal Fabric	Black
220-214	Gold	
220-216	Metal Fabric	White
220-218	Gold	

※ Both right and left

Including : 3.5×35 Flat tapping screw 4pcs

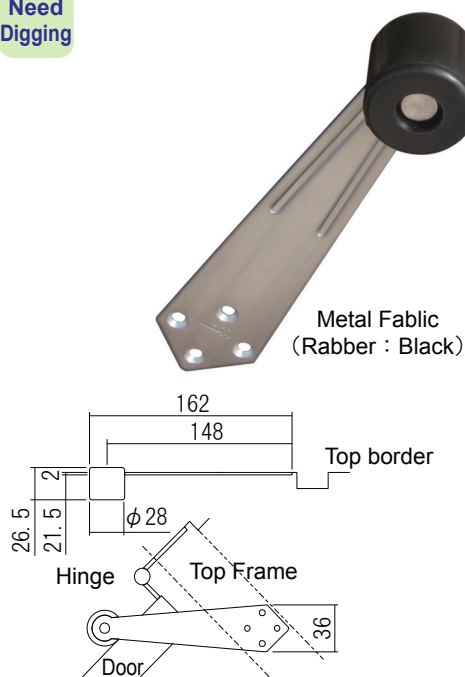

Corporation Doorstop

Load Capacity 294N
Screw driver
Need Digging

This is the spread type.
It is very simple to install it.

Material : <Bracket> SUS304
<Doorstop> Rabber



Load Capacity : 294N (30kg)

Product : Corporation Doorstop

Product No	Finish/Color	Colored rabber
220-221	Metal Fabric	White
220-223	Gold	

※ Both right and left

Including : 3×16 Flat wood screw 3pcs

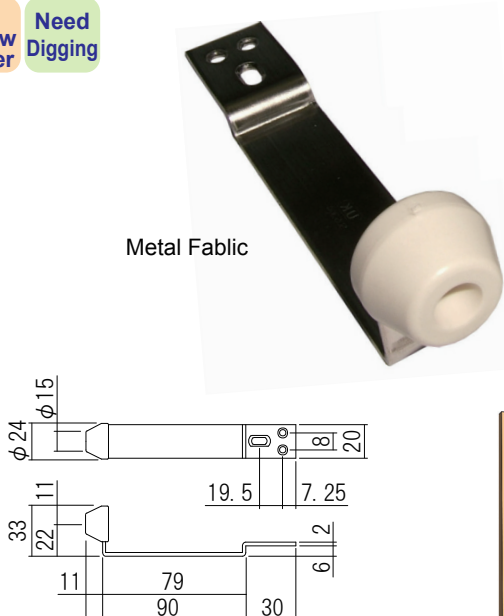

Head with Doorstop

Load Capacity 294N
Screw driver
Need Digging

When you open the door to door, even if not attached to the ceiling and walls above 90° so you can stop by.




Material : <Bracket> SUS304
<Doorstop> Rabber

Load Capacity : 294N (30kg)

Product : Head with Doorstop

Product No	Left-Hand	Right-Hand	Finish/Color	Colored rabber
220-241	220-231		Metal Fabric	White
220-243	220-233		Gold	

Including : 4×25 Flat tapping screw 4pcs

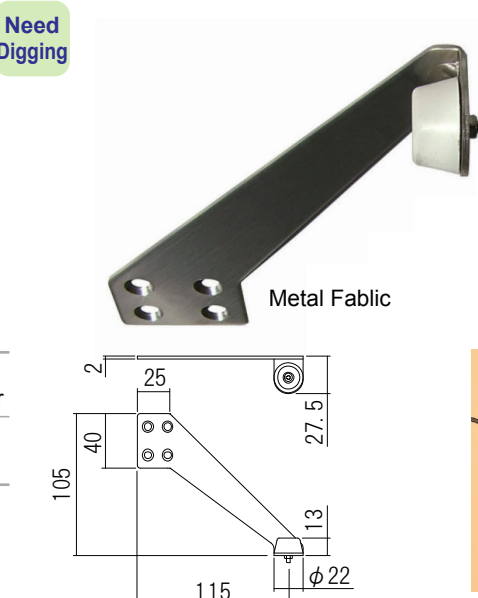

Door Louver

Need Digging

Toolless

Need Adhesive

Door Louver will be installed into the door for ventilation and airflow.
There are three kinds of color variation.

Material : ABS

Product : Door Rattle

Product No	Finish/Color	Specification
630-051	Natural Wood	For one side
630-031	Medium Birch	
630-011	Ivory	
630-061	Natural Wood	For both
630-041	Medium Birch	
630-021	Ivory	

Door thickness for both side : 28~33mm

※ Please give us your inquiries.

We have the different colors other than the above.




Natural Wood



Medium Birch



Ivory

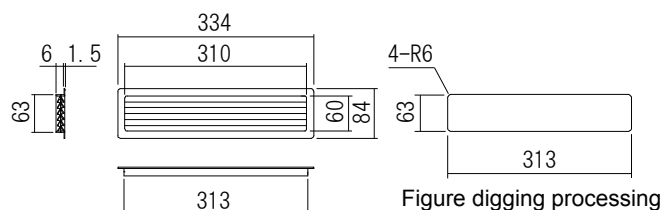

Gray



Natural



Amber



Gold



Received Ping



By Pyong



Silver

Door Holder

Need Digging

Screw driver

Door Holder has a flat bar with special mechanisms to prevent the rattle of window.

Material : POM, SUS430




Product : Door Holder

Product No	Specification	Finish/Color
225-013	Received Ping	Gold
225-015		Silver
225-017		Amber
225-019		Natural
225-021		Gray
225-113	By Pyong (Depth15mm)	Gold
225-115		Silver
225-117		Amber
225-119		Natural
225-121		Gray
225-213	By Pyong (Depth20mm)	Gold
225-215		Silver
225-217		Amber
225-219		Natural
225-221		Gray


Including :

<Door Holder> 3.5×32 Flat wood screw 3pes

<Received> 4×20 Flat tapping screw(D7) 2pes

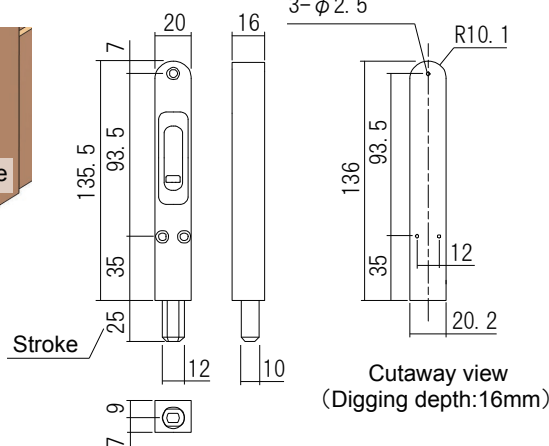

Received Ping



By Pyong

Displaying Lens

Displaying Lens is intended to confirm whether there is a person in rest room.
When it is installed displaying lens in toilet, the processing bari was covered
by it is colored part around a lens. Please use it to toilet door.
It is easy to install it due to circle hole processing and
one touch mounting.

Round $\phi 35$

Door
Thickness
28~36mm


Need
Digging

Toolless

Material : AES, PC

Product : Round $\phi 35$

Product No	Finish/Color		Door Thickness
250-311	Birch	K	28~36 mm
250-312	Natural	N	
250-313	White	W	
250-314	Cherry	C	
250-315	Brown	B	
250-316	Dark	D	
250-317	Painting (HL)		



Painting (HL)



Birch (K)



Natural (N)



White (W)



Cherry (C)



Brown (B)



Dark (D)



Painting (HL)

Round $\phi 38$

Door
Thickness
28~36mm


Need
Digging

Toolless

Material : PP, PS, Si

Product : Round $\phi 38$

Product No	Finish/Color		Door Thickness
250-111	Dark	D A	28~36 mm
250-112	Medium	M E	
250-113	Beige	B J	
250-114	Light	L T	
250-115	Milky	M K	
250-116	Pearl	P A	
250-117	Smoke	S K	
250-118	White	W A	
250-119	Black	B K	



Lens of diamond cut specification(BK).



Light (L T)



Dark (D A)



Medium (M E)



Beige (B J)



Light (L T)



Milky (M K)



Pearl (P A)



Smoke (S K)



White (W A)



Black (B K)



Mirror Finish

HL
(Hair Line)

Mirror Finish

Angle


Door
Thickness
28~36mmNeed
Digging

Toolless

Material : SUS304, PC, Si

Product : Angle □38mm

Product No	Finish/Color	Door Thickness
250-211	HL(Hair Line)	28~36 mm
250-212	Mirror Finish	

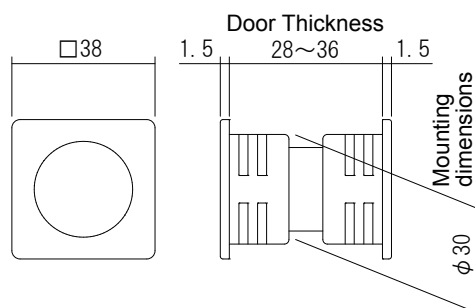

Door Thickness 30mm



Clear

Clerestory

Door
Thickness
30,35mmNeed
Digging


Toolless

BTO

Material : PMMA, A6063-T5

Product : Clerestory

Product No	Finish/Color	Door Thickness
250-411	Clear	30 mm
250-412		35 mm



Door Thickness 35mm

